KAMP

PLASTERING

KAMP PLASTERING

Introduction

As a professional, we know that you care about the finish. The tiny details that make a good job great. The sharp lines and beautiful edges that give you pride in your work. That's why we created the Catnic Plastering range. Not made for the hobbyist. Our products are made with precision from superior materials, for plasterers who care about the finish.

Strip/Coil Mesh

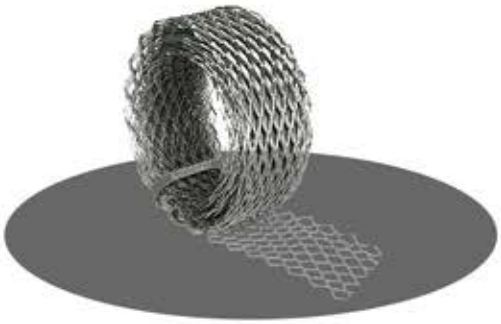

Code	Description	Coil Wing Spice (mm)	Length (mm)	Packing PCS
K17	Strip/ Coil Mesh	100	15	25
K18	Strip/ Coil Mesh	150	15	25
K19	Strip/ Coil Mesh	200	15	25
K20	Strip/ Coil Mesh	250	15	25
K21	Strip/ Coil Mesh	100	30	25
K22	Strip/ Coil Mesh	150	30	25
K23	Strip/ Coil Mesh	200	30	25
K24	Strip/ Coil Mesh	250	30	25

KAMP Strip Mesh (brake reinforcement) is used to provide a bond between dissimilar materials and at crack - prone areas adjacent to openings . KAMP Strip Mesh has a zinc coating of 305g / m² which matches with the requirement of BS 6452 and ASTM 653

Plaster Stop Bead

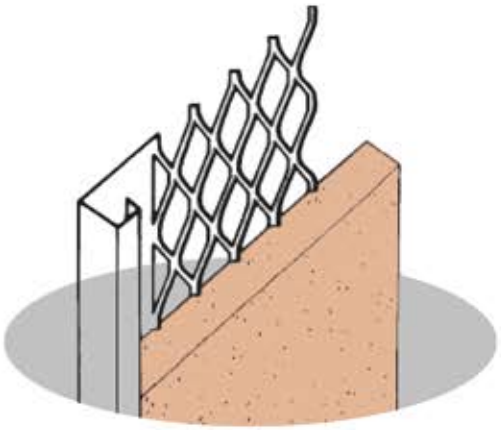

Code	Description	Wing width (mm)	Length (mm)	Packing pcs
K3	Plaster Stop	10	3000	50
K4	Plaster Stop	13	3000	50
K5	Plaster Stop	16	3000	50
K6	Plaster Stop	19	3000	50

KAMP Plaster Stop Bead at excellent to use wherever a finished edge is required . Activate Windows KAMP Plaster Beads have a zinc coating of 305g / m² which matches with the Go to Settings to activate requirement of BS 6452 and ASTM 653

Corner Mesh

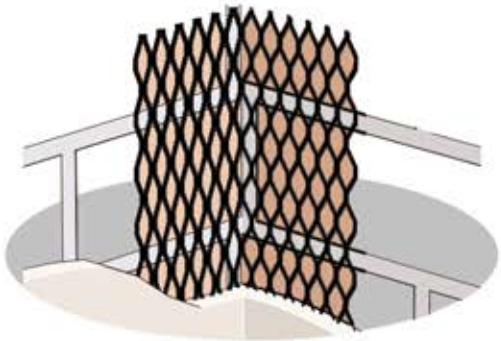

Code	Description	Wing width (mm)	Length (mm)	Packing pcs
K11	Corner Mesh	50 X 50	3000	50
K12	Corner Mesh	50 X 70	3000	50

KAMP Corner Mesh is used for reinforcing internal and external corners and at windows/doors reveals.
KAMP Corner Mesh has a zinc coating of 305g/m² which matches with the requirement of BS 6452 and ASTM 653

Architrave beads

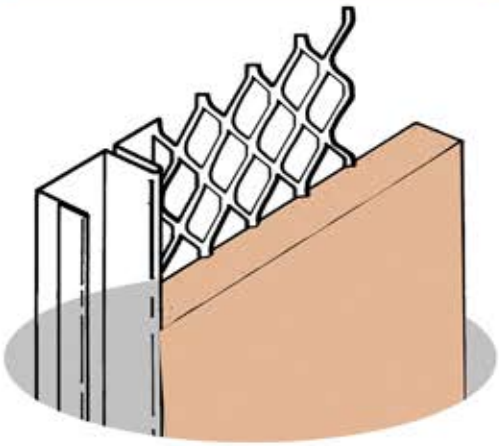

Code	Description	Coil Wing Spice (mm)	Length (mm)	Packing pcs
K13	Architrave Beads	13	3000	25
K14	Architrave Beads	16	3000	25
K15	Architrave Beads	19	3000	25
K16	Architrave Beads	25	3000	25

KAMP Architrave Bead is used to create clean divisions between varying wall finish such as doors and windows reveals . KAMP Architrave Beads have a zinc coating of 305g / m² which matches with the requirement of BS 6452 and ASTM 653

Angle Bead

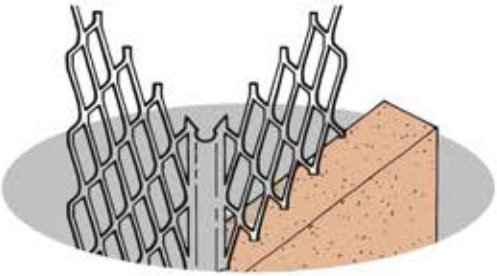

Code	Description	Wing width (mm)	Length (mm)	Packing pcs
K1	Angle Beads	50 x 50	3000	50
K2	Angle Beads	70 x 70	3000	50

KAMP Angle Bead provides a true straight arris that will not easily chip or crack. It also serves as a straight edge and guide for planning of plaster and speeds up the operation of setting out the aaris.

KAMP Angle Beads have a zinc coating of 305g/m² which matches with the requirement of BS 6452 ASTM 653

Metal Lath

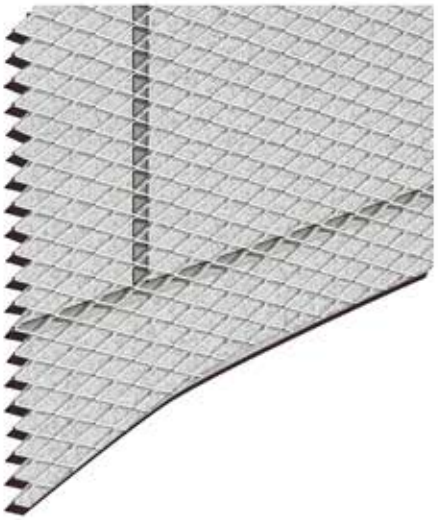

Code	Description	Sheet Size (mm)	Thickness (mm)	Weight (KG)
K24	Metal Lath	600 x 2440	0.3	700
K25	Metal Lath	600 x 2440	0.3	900
K26	Metal Lath	600 x 2440	0.4	800
K27	Metal Lath	600 x 2440	0.4	1100

KAMP Metal Lath provides a versatile base for plastering . It's carefully formed diamond keys allows for proper embedment and keying of the scratch coat on all types of plastering . KAMP Metal Lath can be used with hand and machine applied plastering KAMP Metal Lath has a Zinc coating of 305g / m2 which matches with the requirement of BS6452 and ASTM 653

Block Ladder Mesh

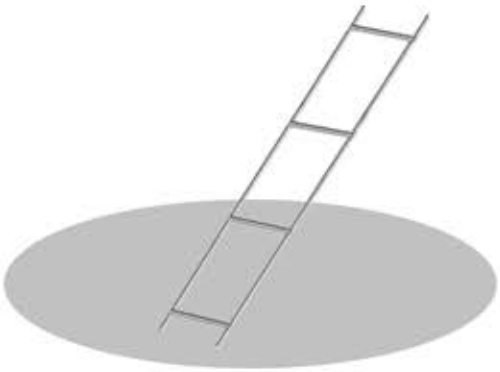

Code	Description	NORMAL WIDTH (mm)	LENGHT (mm)
K7	Block R,C, Mesh	50	3000
K8	Block R,C, Mesh	100	3000
K9	Block R,C, Mesh	150	3000
K10	Block R,C, Mesh	200	3000

400 mm spacing block mesh manufactured from cold drawn steel bars for masonry block reinforcement

KAMP

PLASTERING